
## **FLUANCE**®

## Reference Center (XL8C) Mounting Guide

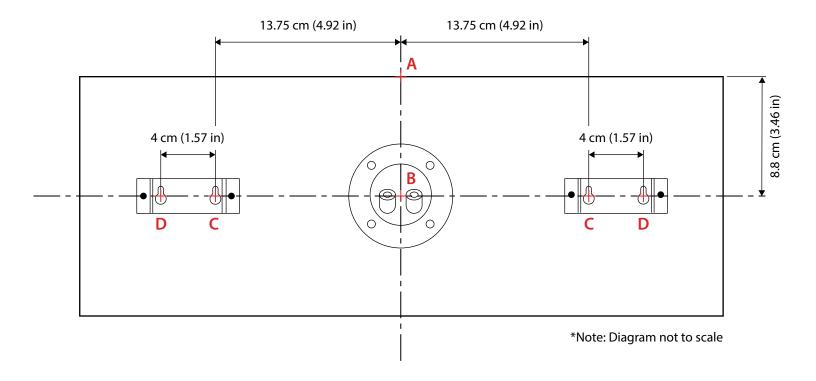

We recommend anchoring your speakers by mounting them to a stud. A stud finder can be used to easily locate them. Most homes are built with 16" (40.6 cm) on-center studs, which means there should be a stud every 16" (40.6 cm). If you have trouble finding studs on a wall, verify how far apart they are in the home by locating and measuring them on another wall. If a stud is not available, drywall anchors must be used.

## **Mounting Steps**

- 1. Place speaker in desired location and mark top edge (A).
- 2. Measure 8.8 cm (3.46 inches) down from the center of the top edge and mark the spot (B).
- 3. Measure 13.75 cm (4.92 inches) from that spot in each horizontal direction and mark (C). (Tip: It is best to use a level to ensure all marks are aligned and level)
- 4. Measure 4 cm (1.57 inches) out from those spots and mark the final holes (D).
- 5. Install screws in both sets of the C and D marks.
- 6. Hang the speaker mount brackets on the screws and ensure the speaker is secure.

If you require assistance, please do not hesitate to contact us at: www.fluance.com/support