
FLUANCE®

Elite Bipolar (SXBP2) Mounting Guide

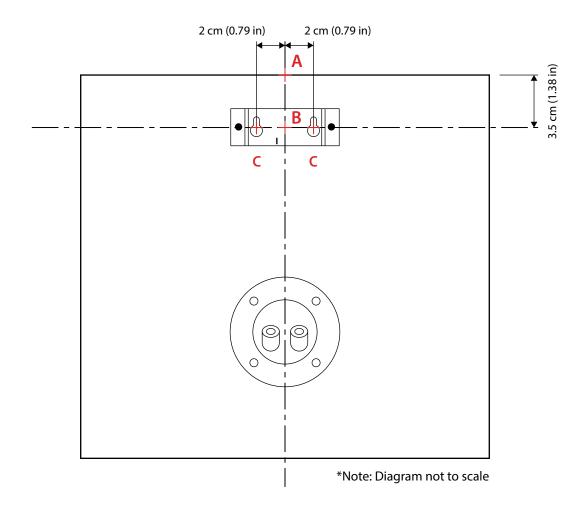

We recommend anchoring your speakers by mounting them to a stud. A stud finder can be used to easily locate them. Most homes are built with 16" (40.6 cm) on-center studs, which means there should be a stud every 16" (40.6 cm). If you have trouble finding studs on a wall, verify how far apart they are in the home by locating and measuring them on another wall. If a stud is not available, drywall anchors must be used.

Mounting Steps

- 1. Place speaker in desired location and mark top edge (A).
- 2. Measure 3.5 cm (1.38 inches) down from the center of the top edge and mark the spot (B).
- 3. Measure 2 cm (0.79 inches) from that spot in each horizontal direction and mark (C). (Tip: It is best to use a level to ensure all marks are aligned and level)
- 4. Install screws in both C marks.
- 5. Hang the speaker mount brackets on the screws and ensure the speaker is secure.

If you require assistance, please do not hesitate to contact us at: www.fluance.com/support